

DT6T10N-BH

DT6T10N-BH TRIAC SILICON BIDIRECTIONAL THYRISTORS

General description


This product TRIAC is a package for third quadrant used in TO-262, DT6T10N-BH is a high commutation performance without snubber circuit. It can be controlled by phase angle trigger or on/off trigger.

FEATURES

- Passivated die for reliability and uniformity
- Three-quadrant triggering, Over 800V V_{DRM}/V_{RRM}
- 150 Degree C operation temperature.
- Without snubber circuit.
- “Green” molding compound,
UL flammability classification 94V-0, (No Br. Sb. Cl)
- Lead free in RoHS II 2015/863/EU compliant
- Moisture sensitivity meets industry standard IPC/JEDEC J-STD-020

APPLICATIONS

- General purpose AC switch control
- Control loads in Motor, Fan, and Pump.
- Solenoid drivers
- LED Dimming
- Inrush current limiting circuits



PIN ASSIGNMENT

	PIN ASSIGNMENT
1	Main Terminal 1 (A1)
2	Main Terminal 2 (A2)
3	Gate

DT6T10N-BH ELECTRICAL CHARACTERISTICS (T_j = 25°C, unless otherwise specified.)

Absolute Ratings

PARAMETER	SYMBOL	VALUE	UNIT
Peak repetitive off-state voltage (T _j = -40 to 150°C, Full sine wave, 50 to 60 Hz; Gate open) (Note 1)	V_{DRM} V_{RRM}	800	V
On-stage RMS current (Full sine wave, T _c = 100°C)	$I_{T(RMS)}$	6	A
Peak non-repetitive surge current (one full cycle 60 Hz, T _j = 25°C)	I_{TSM}	55	A
Circuit fusing consideration (t = 8.3ms)	I^2T	12	A ² S
Operating junction temperature range	T _j	-40 to +150	°C
Storage temperature range	T _{STG}	-40 to +150	°C

Note :

- (1) V_{DRM} and V_{RRM} for all types can be applied on a continuous basis.
Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

Version 0, NOV-2019

DT6T10N-BH

CHARACTERISTIC & CURVES ($T_j = 25^\circ\text{C}$, unless otherwise specified.)



Thermal Characteristics

PARAMETER	SYMBOL	VALUE		UNIT
Thermal resistance from junction to case, without heatsink, (1)	$R_{th(j-c)}$	Max	7.3	$^\circ\text{C/W}$
Junction to Lead, without heatsink, (1)	$R_{th(j-L)}$	Typ	6.5	
Maximum lead temperature for soldering purposes (1/8" form case for 10 seconds)	T_L	Max	260	$^\circ\text{C}$

Note1: unidirectional, continuous & full cycle.

Static Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Threshold Voltage ($T_j = 150^\circ\text{C}$)	V_{to}	--	--	0.96	V
Dynamic resistors ($T_j = 150^\circ\text{C}$)	R_d	--	--	90	$\text{m}\Omega$
Peak repetitive forward or reverse blocking current ($V_{AK} = V_{DRM}$ and V_{RRM} , gate open)	$T_j = 25^\circ\text{C}$	--	--	5	μA
	$T_j = 125^\circ\text{C}$	--	--	700	μA
	$T_j = 150^\circ\text{C}$	--	--	1.9	mA


ON Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Peak forward on-state voltage ($I_{TM} = 6\text{ A @ } T_j = 25^\circ\text{C}$)	V_{TM}	--	--	1.5	V
$V_D = V_{DRM}$, $R_L = 100\Omega$, $T_j = 150^\circ\text{C}$	V_{GD}	0.3	--	--	V
Gate trigger current ($V_{AK} = 12\text{V}$, $R_L = 100\Omega$)	I_{GT1}	--	--	10	mA
	I_{GT2}	--	--	10	
	I_{GT3}	--	--	10	
Gate trigger voltage ($V_{AK} = 12\text{V}$, $R_L = 100\Omega$)	V_{GT1}	--	--	1	V
	V_{GT2}	--	--		
	V_{GT3}	--	--		
Holding current ($V_{AK} = 12\text{V}$, $R_L = 100\Omega$)	I_{H1} I_{H3}	--	--	10	mA
Latching current ($V_{AK} = 12\text{V}$, $R_L = 100\Omega$)	I_{L1}	--	--	30	mA
	I_{L2}	--	--	30	
	I_{L3}	--	--	30	

DT6T10N-BH

CHARACTERISTIC & CURVES (T_j = 25°C, unless otherwise specified.)

TO-262 Plastic Package

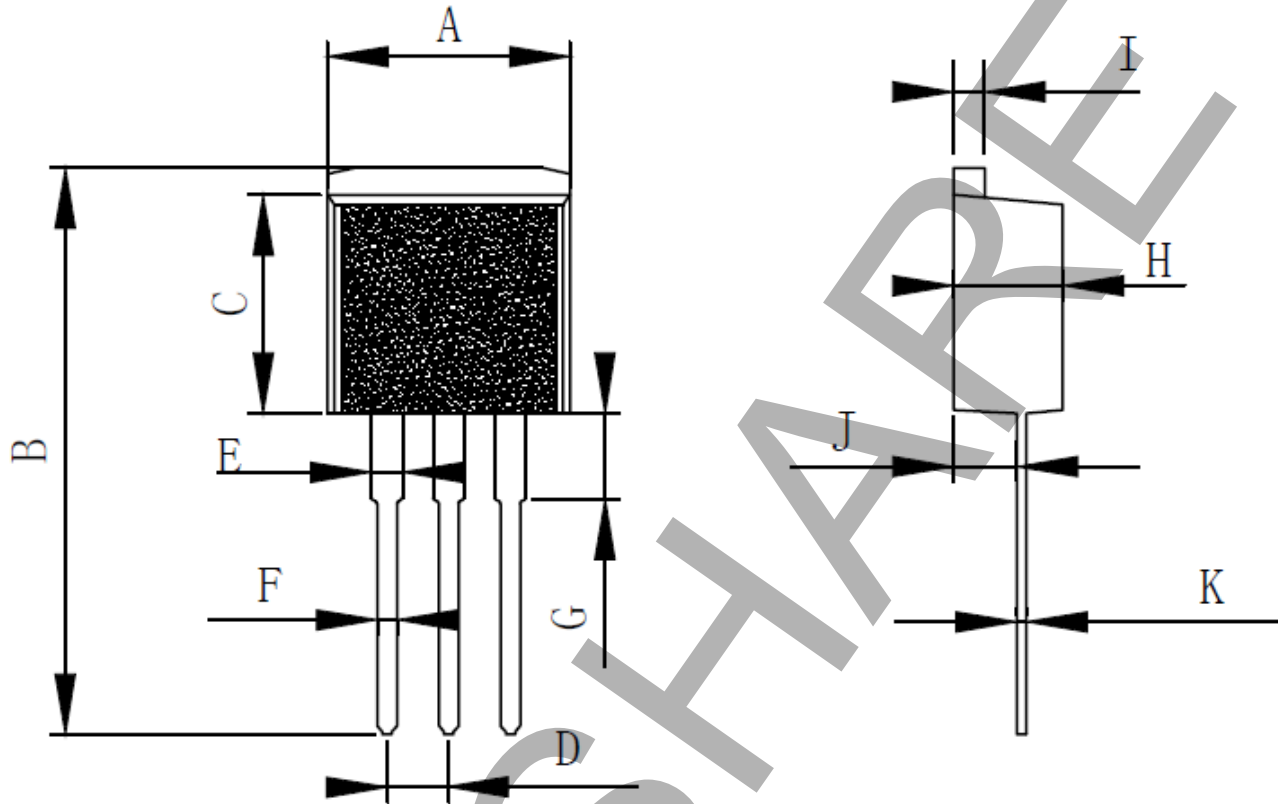

Item	Unit: mm		
	Type	Min	Max
A	10	9.95	10.2
B	23.35	23.25	23.45
C	9	8.9	9.1
D	2.54	2.5	2.6
E	1.27	1.2	1.35
F	0.8	0.75	0.85
G	3.5	3.3	3.6
H	4.5	4.45	4.55
I	1.27	1.25	1.29
J	2.6	2.5	2.7
K	0.4	0.38	0.42

Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.