

# DN2102W

## DN2102W N-Channel Enhancement Mode Field Effect Transistor

### General description


N-Channel Enhancement Mode Field Effect Transistor

### Features:

- $V_{DS}$  : 20V
- $I_D$  : 2.0A
- $R_{DS(ON)}$ ( at  $V_{GS}=4.5V$ ) < 68 mohm
- $R_{DS(ON)}$ ( at  $V_{GS}=2.5V$ ) < 115 mohm
- Trench Power LV MOSFET technology
- High Power and current handing capability

### Applications

- PWM application
- Load switch

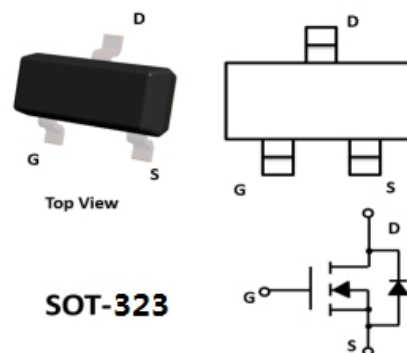

### Device Marking Code:

Device Type	Device Marking
DN2102W	TS2

### Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-source Voltage	$V_{DS}$	20	V
Gate-source Voltage	$V_{GS}$	$\pm 8$	V
Drain Current	$I_D$	2.0	A
Pulsed Drain Current <sup>A</sup>	$I_{DM}$	14	A
Total Power Dissipation @ TA=25°C	$P_D$	0.7	W
Thermal Resistance Junction-to-Ambient @ Steady State <sup>B</sup>	$R_{\theta JA}$	178	°C/W
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 ~ +150	°C

## Electrical Characteristics (T<sub>J</sub>=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
<b>Static Parameter</b>						
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	V <sub>GS</sub> = 0V, I <sub>D</sub> =250μA	20			V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> =20V, V <sub>GS</sub> =0V, T <sub>C</sub> =25°C			1	μA
Gate-Body Leakage Current	I <sub>GSS</sub>	V <sub>GS</sub> = ±10V, V <sub>DS</sub> =0V			±100	nA
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> =250μA	0.45	0.75	1.2	V
Static Drain-Source On-Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> = 4.5V, I <sub>D</sub> =2.0A		50	68	mΩ
		V <sub>GS</sub> = 2.5V, I <sub>D</sub> =1.5A		65	115	
Diode Forward Voltage	V <sub>SD</sub>	I <sub>S</sub> =2.0A, V <sub>GS</sub> =0V			1.2	V
Maximum Body-Diode Continuous Current	I <sub>S</sub>				2.0	A
<b>Dynamic Parameters</b>						
Input Capacitance	C <sub>iss</sub>	V <sub>DS</sub> =10V, V <sub>GS</sub> =0V, f=1MHZ		280		pF
Output Capacitance	C <sub>oss</sub>			46		
Reverse Transfer Capacitance	C <sub>rss</sub>			29		
<b>Switching Parameters</b>						
Total Gate Charge	Q <sub>g</sub>	V <sub>GS</sub> =4.5V, V <sub>DS</sub> =10V, I <sub>D</sub> =4.3A		2.9		nC
Gate Source Charge	Q <sub>gs</sub>			0.4		
Gate Drain Charge	Q <sub>gd</sub>			0.6		
Turn-on Delay Time	t <sub>D(on)</sub>	V <sub>GS</sub> =4.5V, V <sub>DD</sub> =10V, R <sub>L</sub> =1.5Ω, R <sub>GEN</sub> =3Ω		13		ns
Turn-on Rise Time	t <sub>r</sub>			54		
Turn-off Delay Time	t <sub>D(off)</sub>			18		
Turn-off Fall Time	t <sub>f</sub>			11		

A.Pulse Test: Pulse Width ≤300us, Duty cycle ≤2%.

B.Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch.

## Typical Performance Characteristics

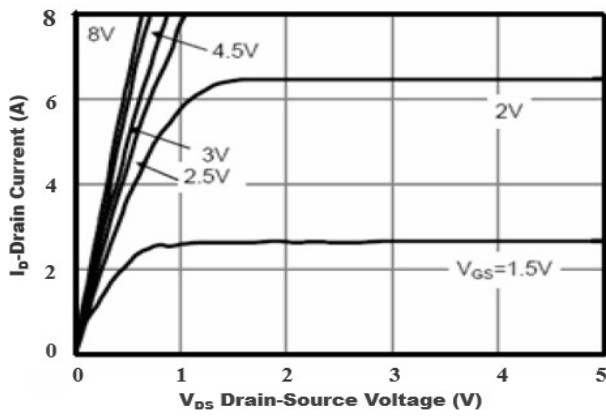


Figure1. Output Characteristics

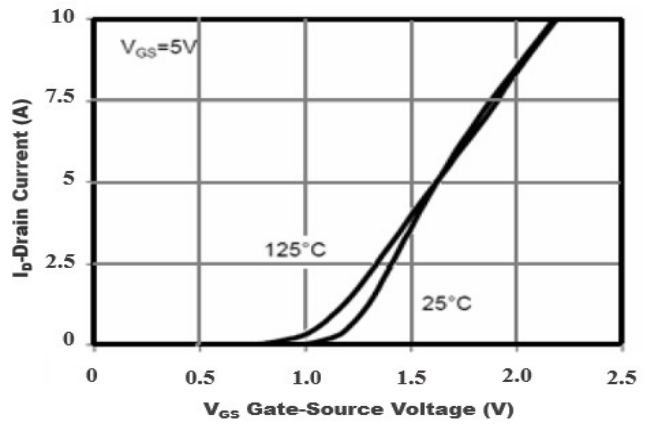


Figure2. Transfer Characteristics

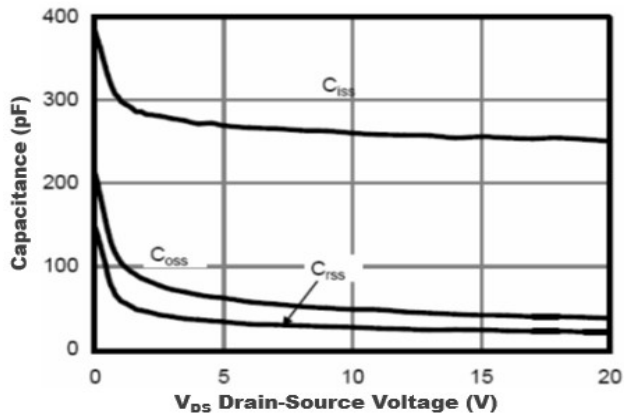


Figure3. Capacitance Characteristics

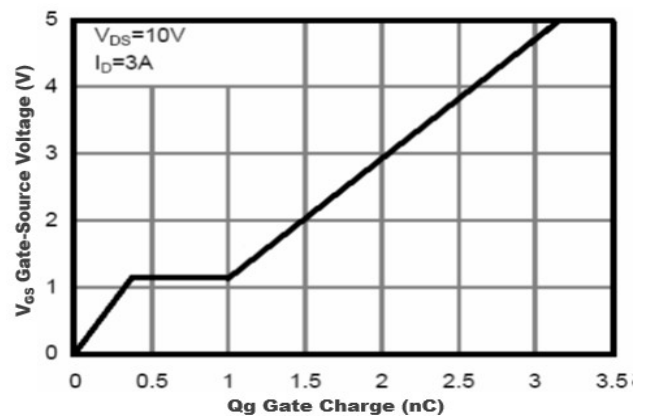


Figure4. Gate Charge

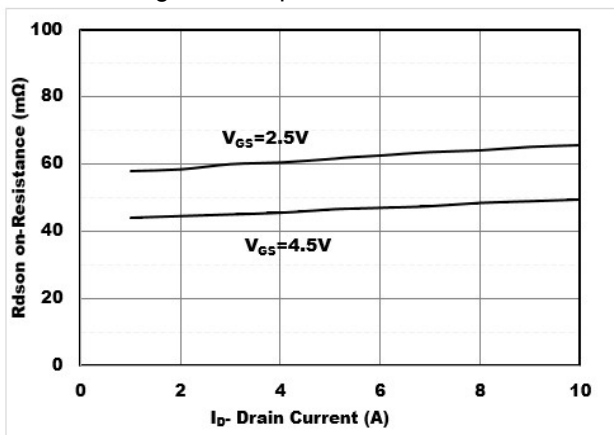


Figure5. Drain-Source on Resistance




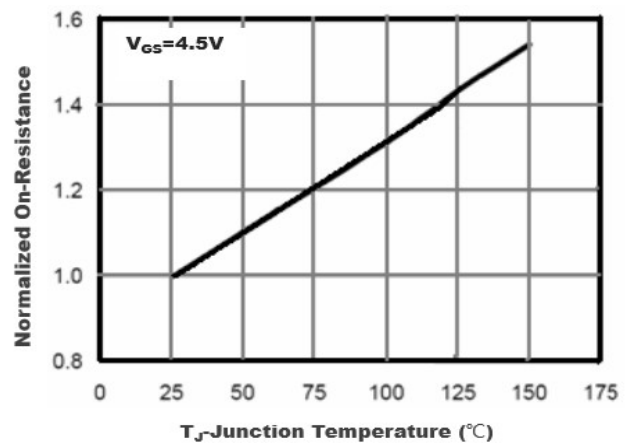


Figure6. Drain-Source on Resistance

## SOT-323 Package Outline

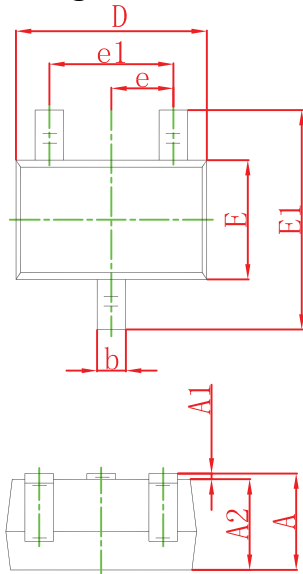

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
	0°	8°	0°	8°



**Note:**

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05$ mm.
3. The pad layout is for reference purposes only.

## Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.