

# ES1A THUR ES1J

## ES1A THUR ES1J Super-Fast Surface Mount Rectifiers

**General description**  
**Super-Fast Surface Mount Rectifiers**  
**Reverse Voltage: 50 to 600V**  
**Forward Current:1.0A**  
**SMA/DO214AC package**


### FEATURES

- Low profile package
- Built-in strain relief
- Easy pick and place
- Superfast recovery times for high efficiency.
- Plastic package has Underwriters Laboratory
- Flammability Classification 94V-O
- Glass passivated junction
- In compliance with EU RoHS 2002/95/EC directives

### MECHANICAL DATA

- Case: JEDEC DO-214AC molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750 ,Method 2026
- Polarity: Indicated by cathode band.
- Standard packaging: 12mm tape (EIA-481)
- Weight: 0.002 ounce, 0.064 gram

### SMA/DO-214AC

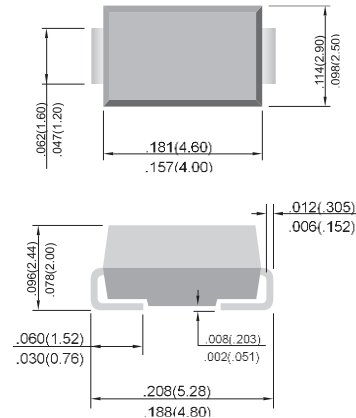



Unit: inch (mm)

### Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)


Parameter	SYMBOLS	ES1A	ES1B	ES1C	ES1D	ES1E	ES1G	ES1J	UNITS	
Marking Code	MARK	ES1A	ES1B	ES1C	ES1D	ES1E	ES1G	ES1J	N/A	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	150	200	300	400	600	VOLTS	
Maximum RMS voltage	V <sub>RMS</sub>	35	70	105	140	210	280	420	VOLTS	
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	150	200	300	400	600	VOLTS	
Maximum average forward rectified current at T <sub>L</sub> =55°C	I <sub>(AV)</sub>	1.0							Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	30.0							Amps	
Maximum instantaneous forward voltage at 1.0A	V <sub>F</sub>	0.95				1.3		1.7	Volts	
Maximum DC reverse current at rated DC blocking voltage	I <sub>R</sub>	5.0				50.0				uA
Maximum reverse recovery time (NOTE 1)	t <sub>rr</sub>	35				ns				
Typical junction capacitance (NOTE 2)	C <sub>J</sub>	15.0				pF				
Typical thermal resistance (NOTE 3)	R <sub>qJA</sub>	60.0				°C/W				
Operating junction and storage temperature range	T <sub>J</sub> ,T <sub>STG</sub>	-55 to +150							°C	

Note:1.Reverse recovery condition IF=0.5A,IR=1.0A,Irr=0.25A


2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

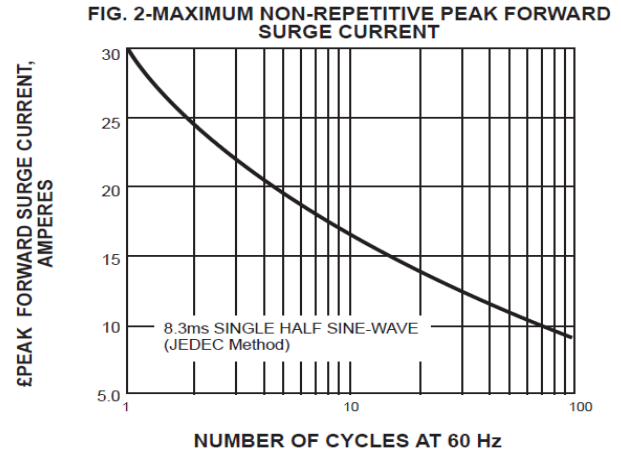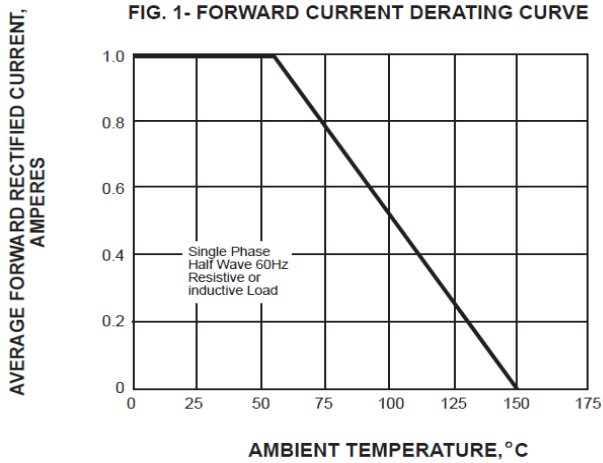


**FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

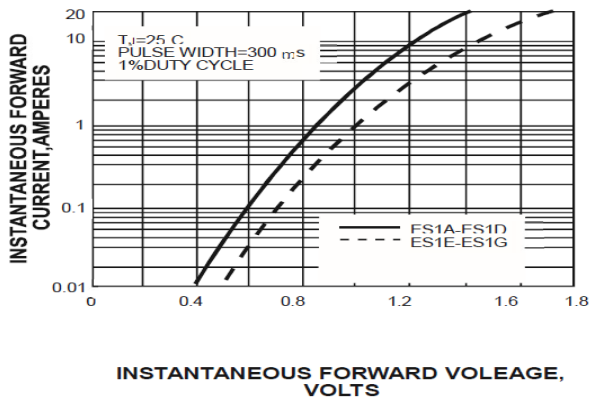


**FIG. 4-TYPICAL REVERSE CHARACTERISTICS**

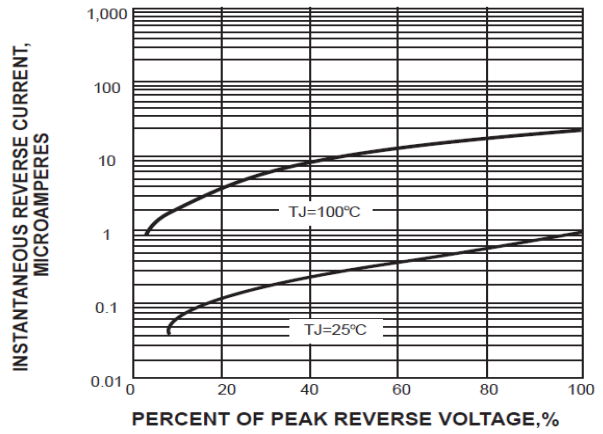

**FIG. 5-TYPICAL JUNCTION CAPACITANCE**

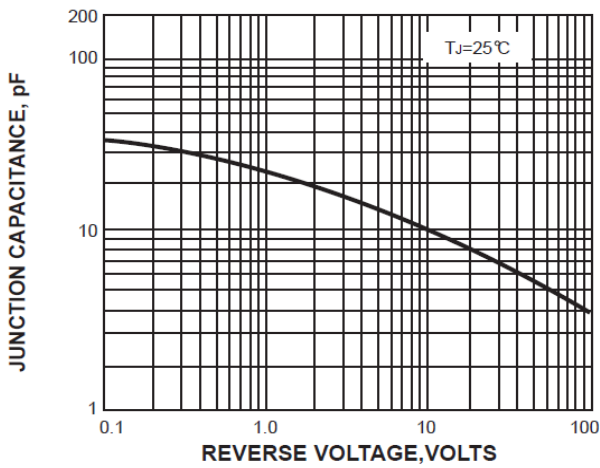


**FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE**

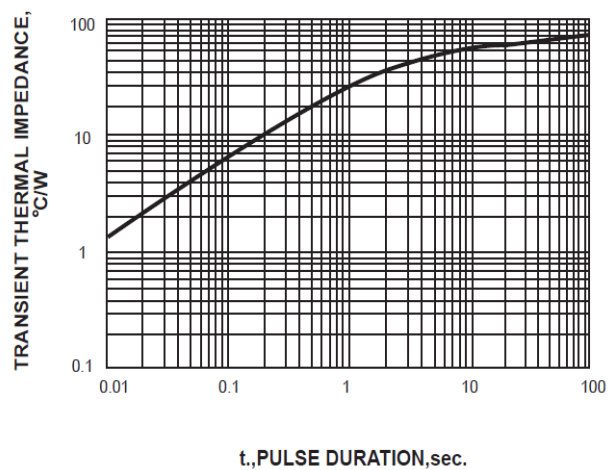

# ES1A THUR ES1J


## Suggested Soldering Temperature Profile

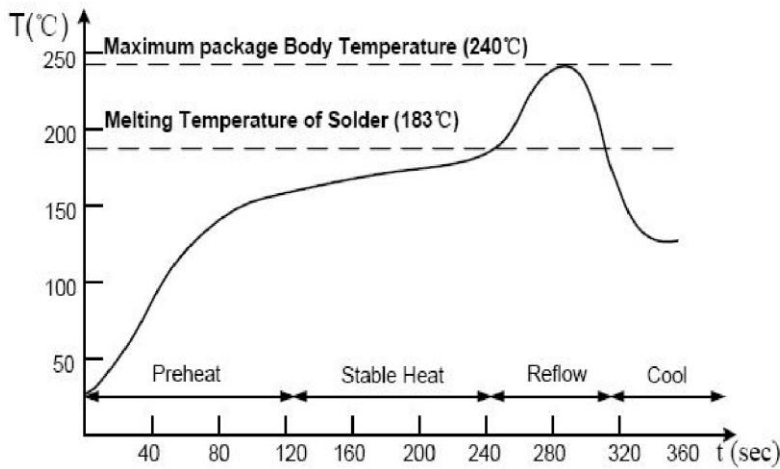

### Note

- ◆ Recommended reflow methods: IR, vapor phase oven, hot air oven, wave solder.
- ◆ The device can be exposed to a maximum temperature of 265°C for 10 seconds.
- ◆ Devices can be cleaned using standard industry methods and solvents.
- ◆ If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

## Package Information

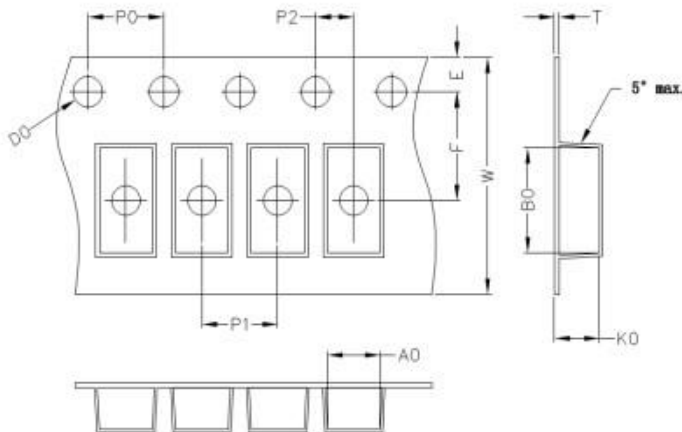

A0	B0	K0	D0	E	F
2.80	5.30	2.36	1.55	1.75	5.50
P0	P1	P2	T	W	Tolerance
4.0	4.0	2.0	0.25	12	0.1

## Package Specifications

Package	Reel Size	Reel DIA. (mm)	Q'TY/Reel (Kpcs)	Box Size (mm)	QTY/Box (Kpcs)	Carton Size (mm)	Q'TY/Carton (Kpcs)
SMA	7'	178	2	180*180*73	8	380*200*200	80
	11'	280	5	288*288*38	10	355*310*310	80

## **Important Notice and Disclaimer**

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.

