

SS32 THUR SS310

SS32 THUR SS310 Schottky Barrier Rectifiers

General description

3.0Amp Surface Mounted Schottky Barrier Rectifiers


FEATURES

- Flammability Classification 94V-O
- Plastic package has Underwriters Laboratory
- For surface mounted applications
- Built-in strain relief
- High surge capacity

MECHANICAL DATA

- Case: JEDEC DO-214AB molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750 Method 2026
- Polarity: Color band denotes cathode
- Weight: 0.007 ounce, 0.25 gram

SMC/DO214AB

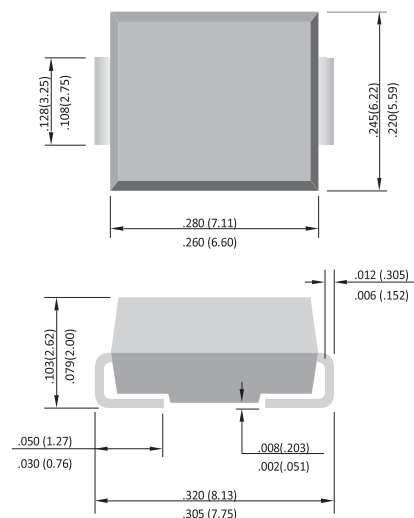

Unit: inch (mm)

Maximum Ratings And Electrical Characteristics

Characteristic	Symbol	SS32	SS33	SS34	SS35	SS36	SS38	SS39	SS310	Unit
Marking Code	Mark	SS32	SS33	SS34	SS35	SS36	SS38	SS39	SS310	N/A
Peak Repetitive Reverse Voltage	V_{RRM}									
Working Peak Reverse Voltage	V_{RWM}	20	30	40	50	60	80	90	100	V
DC Blocking Voltage	V_R									
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	35	42	56	64	70	V
Average Rectified Output Current	I_O	3.0								A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	100								A
Forward Voltage @ $I_F = 5.0A$	V_{FM}	0.45	0.55	0.6	0.7	0.85			V	
Peak Reverse Current @ $T_A = 25^\circ C$ At Rated DC Blocking Voltage @ $T_A = 100^\circ C$	I_{RM}	0.5 20								mA
Typical Thermal Resistance Junction to Ambient (Note 1)	R_{JA}	55								K/W
Typical junction capacitance	C_J	500				350				pF
Operating Temperature Range	T_j	-55 to +150								$^\circ C$
Storage Temperature Range	T_{STG}	-55 to +150								$^\circ C$

Note: 1.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC
2.Thermal resistance junction to ambient



SS32 THUR SS310

Rating And Characteristic Curves

FIG. 1- FORWARD CURRENT DERATING CURVE

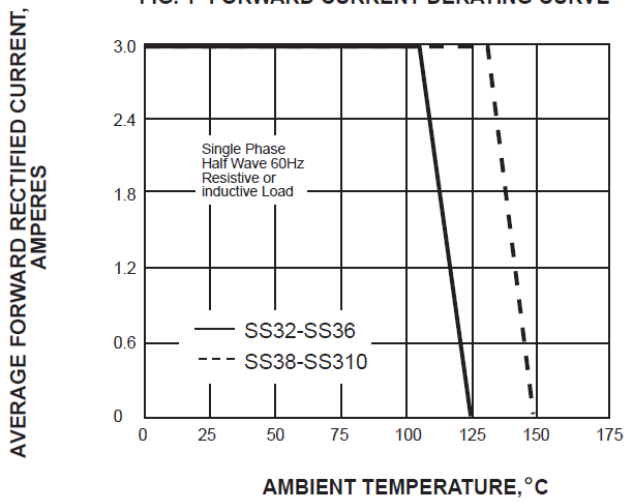


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

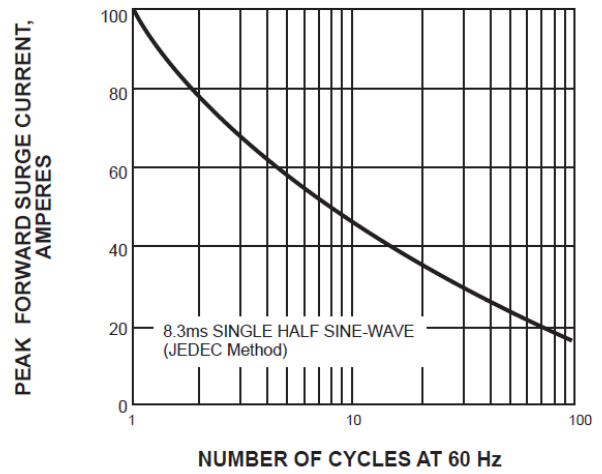


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

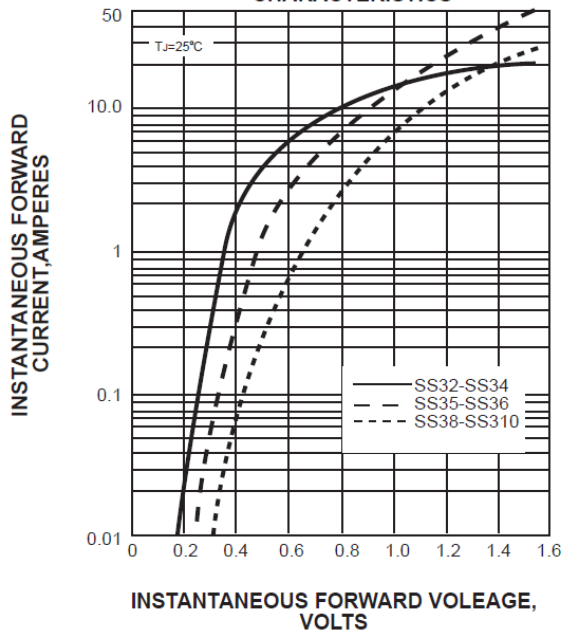


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

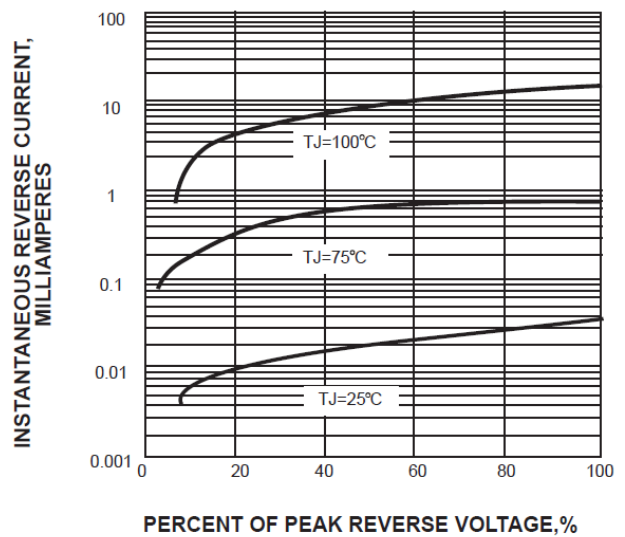


FIG. 5-TYPICAL JUNCTION CAPACITANCE


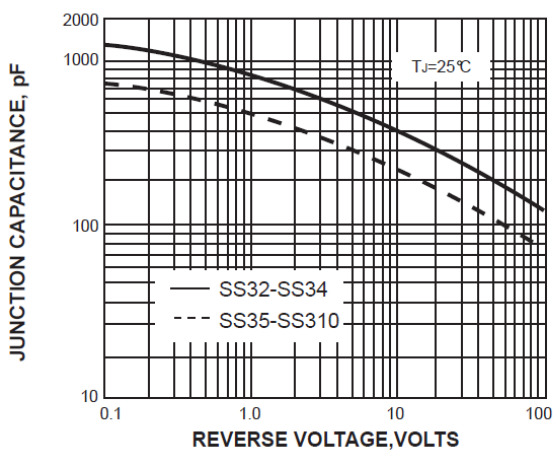


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

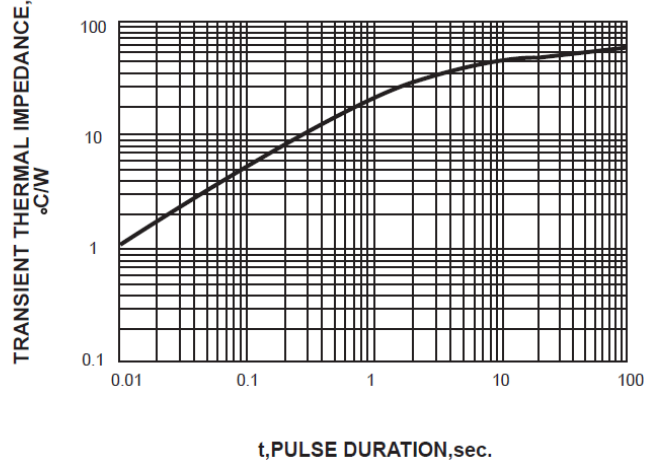

Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.