

SMF Series

SMF Series Transient Voltage Suppressors

General description


Power TVS in a SOD-123FL Plastic Package.

FEATURES

- Glass passivated junction.
- 200W peak pulses power(10/1000uS).
- Uni and Bidirectional unit.
- Low Clamping Voltage.
- Low Leakage Current.
- Very fast response time.

MECHANICAL DATA

- Case: SOD-123FL, RoHs Compliant
- Plastic package Flammability Rating UL 94 V-0

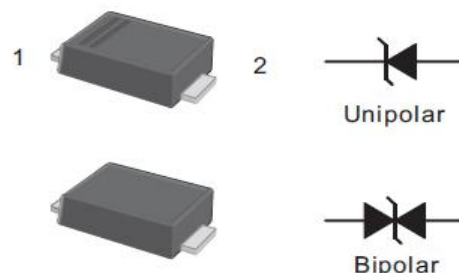

Top View

Simplified outline SOD-123FL and symbol

PIN	DESCRIPTION
1	Cathode
2	Anode

Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation on TA=25°C (Note 1,2,5) Fig1	P _{PPM}	200	W
Peak Forward Surge Current (Note 3)	I _{FSM} (UNI)	20	A
Peak Pulse Current on 10/1000 us waveform (Note 1) Fig2	I _{PPM}	See Next Table	A
Operating Junction Temperature and Storage Temperature Range	T _J , T _{stg}	-55 ~ +150	°C
Typical Thermal Resistance	R _{θJA}	180	°C/W

NOTES:

1. Non-repetitive current pulse per Fig 3 and derated above TA=25°C per Fig 2
2. Mounted on 5mm² copper pads to each terminal
3. 8.3ms single half sinewave, or equivalent square wave duty cycle=4 pulses per minutes maximum
4. lead temperature at TL=75°C
5. Peak pulse powe. waveform is tp=10/1000us
6. A transient suppressor is selected according to the working peak reverse voltage(VRWM), Which Should be equal to or greater than the DC or continuous peak operating voltage level.

SMF Series

Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

Type		Marking		VRMW	Breakdown Voltage		Test Current	Reverse Leakage	Max. Clamp Voltage	Peak Pulse Current
					VBR @ IT		IT	IR @ VRWM	VC @ IPP	IPP
					Min	Max				
Uni	Bi	Uni	Bi	V	V	V	mA	μA	V	A
SMF5.0A	SMF5.0CA	AE	NE	5	6.4	7	10	200	9.2	21.7
SMF6.0A	SMF6.0CA	AG	NG	6	6.67	7.37	10	100	10.3	19.4
SMF6.5A	SMF6.5CA	AK	NK	6.5	7.22	7.98	10	75	11.2	17.9
SMF7.0A	SMF7.0CA	AM	NM	7	7.78	8.6	10	50	12	16.7
SMF7.5A	SMF7.5CA	AP	NP	7.5	8.33	9.21	1	50	12.9	15.5
SMF8.0A	SMF8.0CA	AR	NR	8	8.89	9.83	1	25	13.6	14.7
SMF8.5A	SMF8.5CA	AT	NT	8.5	9.44	10.4	1	10	14.4	13.9
SMF9.0A	SMF9.0CA	AV	NV	9	10	11.1	1	5	15.4	13
SMF10A	SMF10CA	AX	NX	10	11.1	12.3	1	2.5	17	11.8
SMF11A	SMF11CA	AZ	NZ	11	12.2	13.5	1	2.5	18.2	11
SMF12A	SMF12CA	BE	NE	12	13.3	14.7	1	2.5	19.9	10.1
SMF13A	SMF13CA	BG	NG	13	14.4	15.9	1	1	21.5	9.3
SMF14A	SMF14CA	BK	OK	14	15.6	17.2	1	1	23.2	8.6
SMF15A	SMF15CA	BM	OM	15	16.7	18.5	1	1	24.4	8.2
SMF16A	SMF16CA	BP	OP	16	17.8	19.7	1	1	26	7.7
SMF17A	SMF17CA	BR	OR	17	18.9	20.9	1	1	27.6	7.2
SMF18A	SMF18CA	BT	OT	18	20	22.1	1	1	29.2	6.8
SMF20A	SMF20CA	BV	OV	20	22.2	24.5	1	1	32.4	6.2
SMF22A	SMF22CA	BX	OX	22	24.4	26.9	1	1	35.5	5.6
SMF24A	SMF24CA	BZ	OZ	24	26.7	29.5	1	1	38.9	5.1
SMF26A	SMF26CA	CE	PE	26	28.9	31.9	1	1	42.1	4.8
SMF28A	SMF28CA	CG	PG	28	31.1	34.4	1	1	45.4	4.4
SMF30A	SMF30CA	CK	PK	30	33.3	36.8	1	1	48.4	4.1
SMF33A	SMF33CA	CM	PM	33	36.7	40.6	1	1	53.3	3.8
SMF36A	SMF36CA	CP	PP	36	40	44.2	1	1	58.1	3.4
SMF40A	SMF40CA	CR	PR	40	44.4	49.1	1	1	64.5	3.1
SMF43A	SMF43CA	CT	PT	43	47.8	52.8	1	1	69.4	2.9
SMF45A	SMF45CA	CV	PV	45	50	55.3	1	1	72.7	2.8
SMF48A	SMF48CA	CX	PX	48	53.3	58.9	1	1	77.4	2.6
SMF51A	SMF51CA	CZ	PZ	51	56.7	62.7	1	1	82.4	2.4
SMF54A	SMF54CA	CA	PA	54	60	66.3	1	1	87.1	2.3
SMF58A	SMF58CA	CC	PC	58	64.4	71.2	1	1	93.6	2.1
SMF60A	SMF60CA	NK	DK	60	66.7	73.7	1	1	96.8	1.8
SMF64A	SMF64CA	NM	DM	64	71.1	78.6	1	1	103	1.7
SMF70A	SMF70CA	NP	DP	70	77.8	86	1	1	113	1.5
SMF75A	SMF75CA	NR	DR	75	83.3	92.1	1	1	121	1.4
SMF78A	SMF78CA	NT	DT	78	86.7	95.8	1	1	126	1.4
SMF85A	SMF85CA	NV	DV	85	94.4	104	1	1	137	1.3
SMF90A	SMF90CA	NX	DX	90	100	111	1	1	146	1.2
SMFI00A	SMFI00CA	NZ	DZ	100	111	123	1	1	162	1.1
SMF110A	SMF110CA	PE	EE	110	122	135	1	1	177	1
SMF120A	SMF120CA	PG	EG	120	133	147	1	1	193	0.9

SMF Series

Type		Marking		VRMW	Breakdown Voltage		Test Current	Reverse Leakage	Max. Clamp Voltage	Peak Pulse Current
					VBR @ IT		IT	IR @ VRWM	VC @ IPP	IPP
					Min	Max				
Uni	Bi	Uni	Bi	V	V	V	mA	μA	V	A
SMF130A	SMF130CA	PK	EK	130	144	159	1	1	209	0.8
SMF150A	SMF150CA	PM	EM	150	167	185	1	1	243	0.7
SMF160A	SMF160CA	PP	EP	160	178	197	1	1	259	0.7
SMF170A	SMF170CA	PR	ER	170	189	209	1	1	275	0.6
SMF180A	SMF180CA	PT	ET	180	201	222	1	1	292	0.5
SMF200A	SMF200CA	PX	EX	200	224	247	1	1	324	0.5
SMF220A	SMF220CA	QE	PE	220	246	272	1	1	356	0.5

Fig.1 Peak Pulse Power Rating Curve

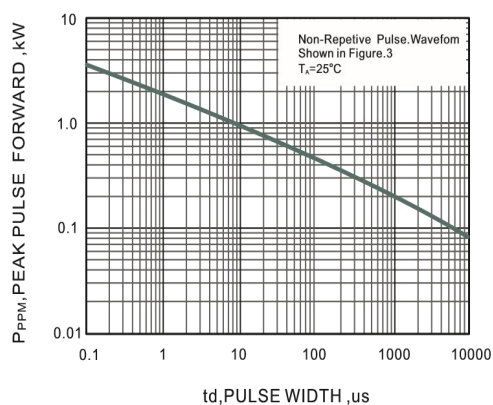


Fig.2 Forward Current Derating Curve

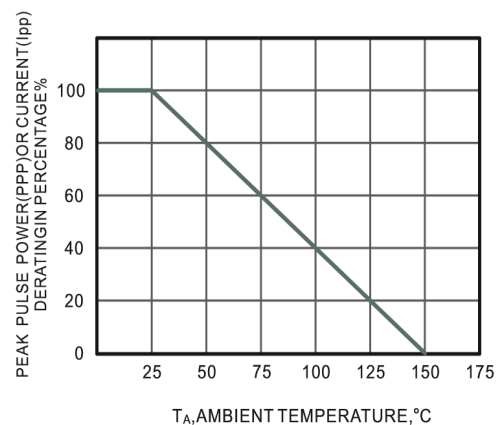


Fig.3 Pulse Waveform


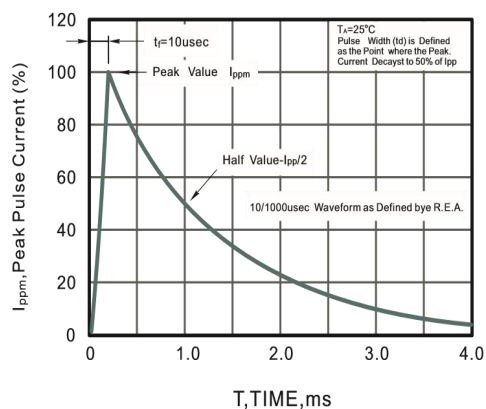



Fig.4 Maximum Non-Repetitive Peak Forward Surge Current

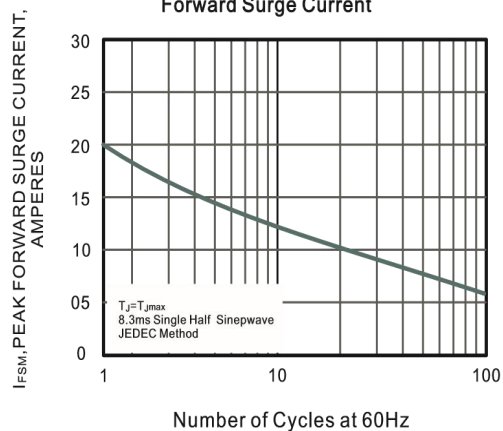

SMF Series


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads SOD-123FL

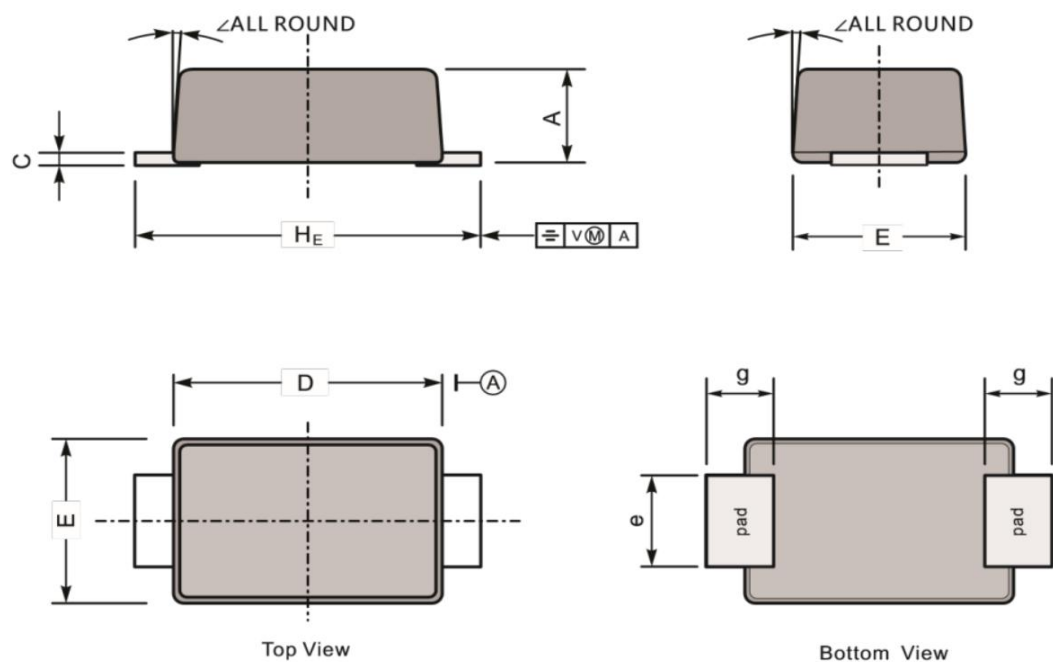

UNIT		A	C	D	E	e	g	HE	∠
mm	MAX	1.25	0.2	2.95	2.0	1.1	0.9	3.9	7°
	MIN	0.95	0.11	2.6	1.7	0.8	0.7	3.5	

The recommended mounting pad size

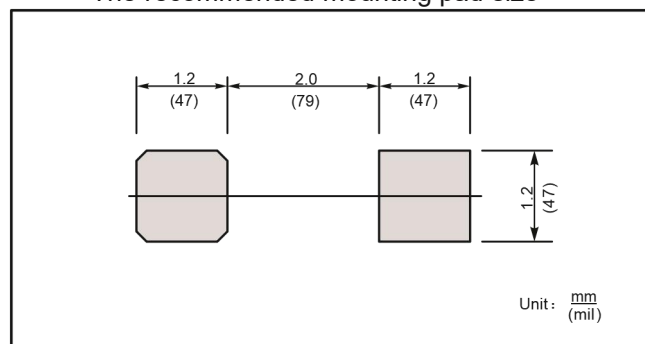

Important Notice and Disclaimer

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.