

# ESD1006NC7VB

## ESD1006NC7VB


### Transient Voltage Suppressors ESD Protection Diode

#### General description


Silicon Protection Diode in a DFN1006 Package.

#### FEATURES

- 60 Watt peak pulse power (t/p=8/20)
- Capacitance Typ. 6 pF
- Bidirectional configurations
- Low Leakage Current
- Low clamping voltage
- Protection one data line / Power Line to :
- IEC 61000-4-2 ±30Kv Contact ±30Kv air.
- IEC 61000-4-4 EFT 40A(5/50nS)
- IEC 61000-4-5 Lightning 6A(8/20uS)
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish

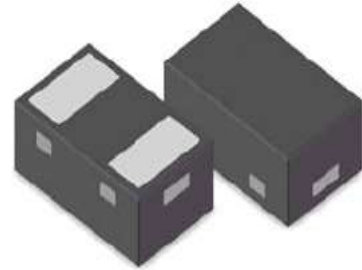

DFN1006 Package

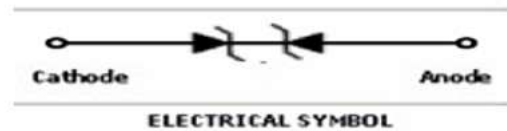

#### Absolute Maximum Ratings (T<sub>A</sub> = 25°C unless otherwise noted)


Symbol	Parameter	Value	Units
P <sub>pp</sub>	Peak pulse power	60	W
T <sub>L</sub>	Max Lead Solder Temperature range (10 Second Duration)	260	°C
T <sub>stg</sub>	Storage Temperature Range	-55 to +150	°C
T <sub>J</sub>	Junction Temperature	-55 to +125	°C
ESD	IEC61000-4-2 Air Discharge	±30	KV
	Contact Discharge	±30	
EFT	IEC61000-4-4	40	A
Lightning	IEC61000-4-5	6	A

#### Device Marking:

Device Type	Marking	Shipping
ESD1006NC7VB	C7	10,000/Reel

#### Electrical Parameter

Symbol	Parameter
I <sub>PP</sub>	Maximum Reverse Peak Pulse Current
V <sub>C</sub>	Clamping Voltage @ I <sub>PP</sub>
V <sub>RWM</sub>	Working Peak Reverse Voltage
I <sub>R</sub>	Maximum Reverse Leakage Current @ V <sub>RWM</sub>
I <sub>T</sub>	Test Current
V <sub>BR</sub>	Breakdown Voltage @ I <sub>T</sub>

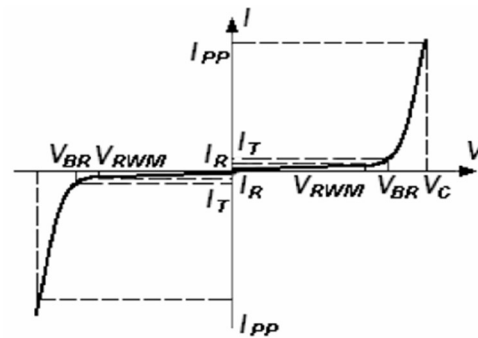

#### Electrical Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
V <sub>BR</sub>	Reverse Breakdown Voltage	I <sub>T</sub> =1mA	--	8.5	--	Volts
V <sub>RWM</sub>	Reverse Stand-off Voltage		--	--	7	Volts
I <sub>R</sub>	Reverse Leakage Current	V <sub>R</sub> =7V	--	--	1	uA
V <sub>C</sub>	Clamping Voltage(IEC 61000-4-5)	I <sub>pp</sub> =6A	--	--	10	Volts
C <sub>j</sub>	Junction Capacitance	V <sub>R</sub> =0V, f= 1MHz	--	6	--	pF

# ESD1006NC7VB

Typical Characteristics ( $T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified)

Fig.1 Peak Pulse Power Rating Curve

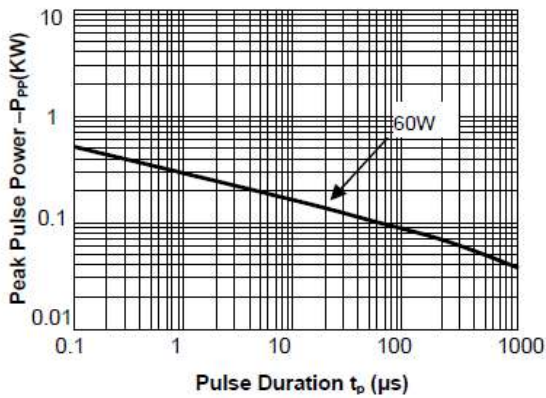


Fig.2 Pulse Derating Curve

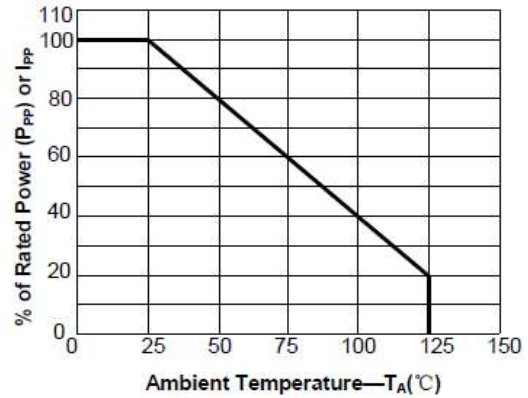


Fig.3 Pulse Waveform-8/20μs



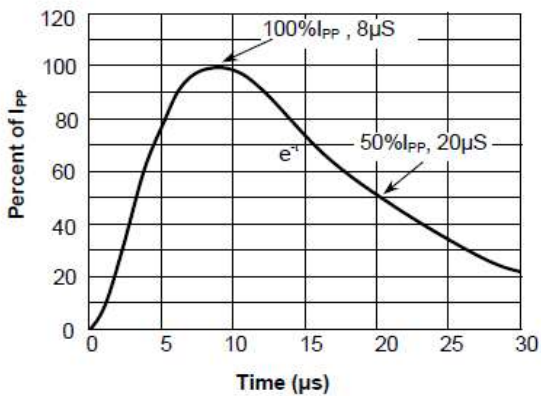



Fig.4 Pulse Waveform-ESD(IEC61000-4-2)

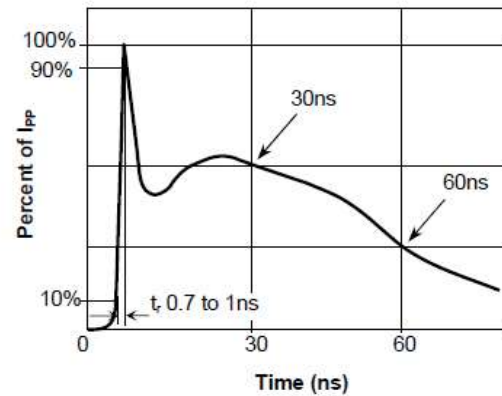

## DFN1006 Package Outline

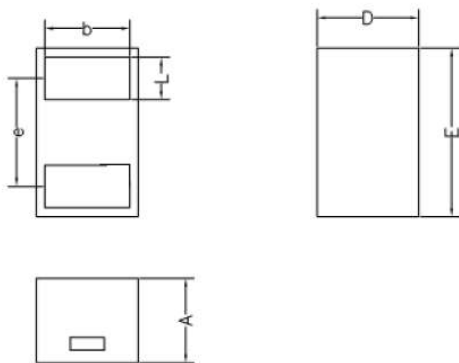

Symbol	Dimensions in millimeters		
	Min	Nom	Max
D	0.55	0.60	0.65
E	0.95	1.00	1.05
b	0.45	0.50	0.55
L	0.20	0.25	0.30
e	0.64 BSC		
A	0.45	0.50	0.55

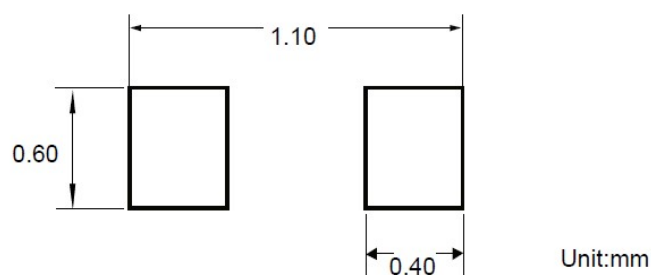

## **Important Notice and Disclaimer**

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.